


REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	7/11/2013	DCA

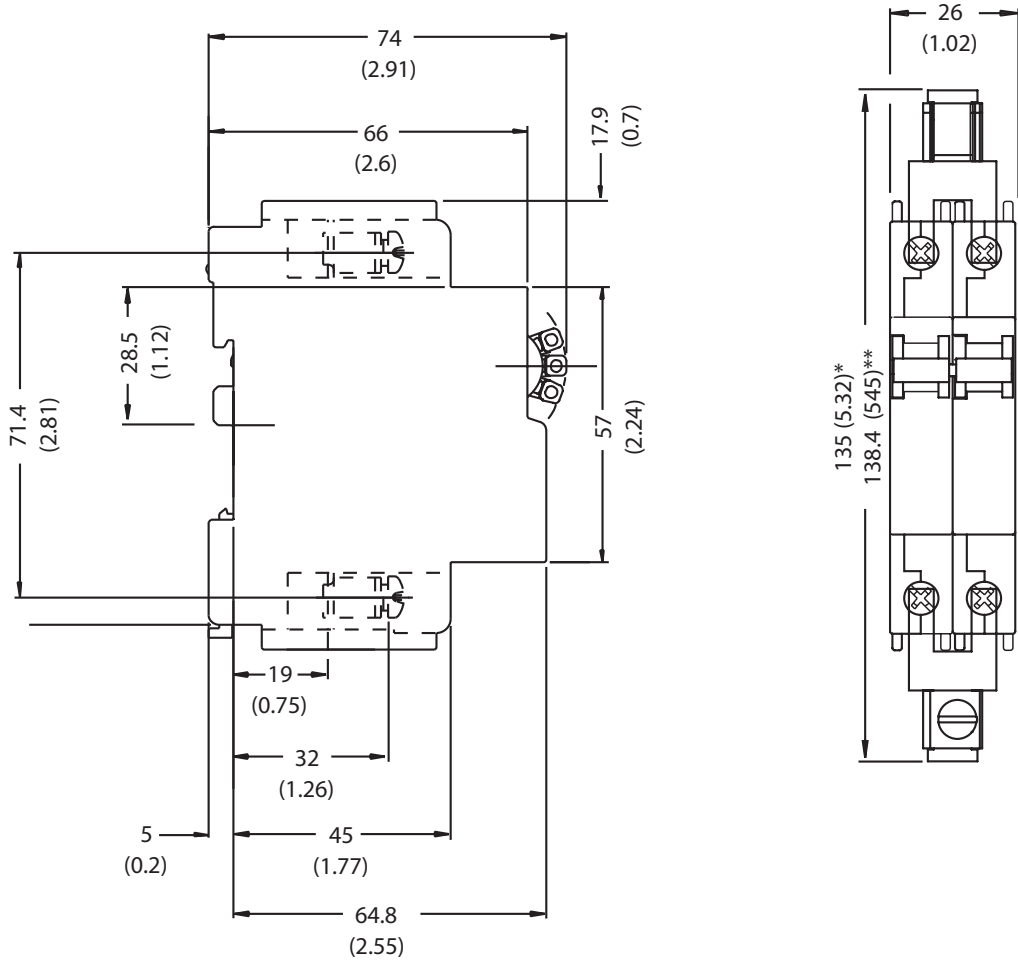

Hydraulic-magnetic for reduced nuisance tripping  
 Breakers hold 100% rated current independent of ambient temperature  
 QY Frame 26 mm width  
 Dinrail (Dual) mount

Specifications:  
 Max. Voltage 150VDC  
 Max. Interrupting Capacity 10 kA rms  
 Trip MNEPV80 80AMPS MNEPV100 100Amps  
 ETL Listed to 150VDC

NOTE: DIMENSIONS IN BRACKETS ARE IN "INCHES"  
 \* Dimension as shipped  
 \*\* Dimension after bending lug (Optional).  
 Overall height will vary slightly.



17722 67th AVE N.E.  
 ARLINGTON, WA  
 98223 USA

DOC TITLE

MNEPV80 / 100 Dimensions

DRAWN BY DCA

DATE 7/11/13

DOC NUMBER

MNEPV80 / 100

SHT 1 of 1