

MODEL

MNPV6 MNPV3

ELECTRICAL RATINGS:

- 800VDC WHEN USED WITH USMT FUSE HOLDERS
- 250VDC WHEN USED WITH CBI OY BREAKERS
- 250VDC, 2000A WHEN USING CBI OY BREAKERS
- 250VDC, 1000A WHEN USING CBI OY BREAKERS
- SOLAR MNPV SERIES BREAKERS ARE ETL LISTED

FOR 1800VDC OPERATION:

- MAXIMUM CONTINUOUS CURRENT: 1000A
- MAXIMUM CONTINUOUS VOLTAGE: 1800VDC
- THIS ENCLOSURE IS INTENDED FOR DC ONLY
- MOUNTING: TILTED BACK TO 22.5° - 90° VERTICAL
- SHORT CIRCUIT CURRENT RATINGS: 10000 AIC FOR ROSSMAN KALIBROV FUSES
- 10000 AIC FOR MOUNTS MNPV3, CBI OY BREAKERS

CAUTION FOR CONTINUED PROTECTION OF THE DEVICE FROM OVERCURRENT, WITH SAME TYPE AND RATING OF FUSE, ADDITIONAL OR REPLACEMENT DEVICES SHALL BE OF THE SAME MANUFACTURER TYPE DESIGN. THE SHORT CIRCUIT CURRENT RATING OF THIS DEVICE IS LIMITED TO THE LOWEST INTERRUPTING RATING OF ANY INSTALLED CIRCUIT BREAKER OR CONNECTED CIRCUIT BREAKER.

- USE COPPER WIRE ONLY RATED FOR 75°
- ENCLOSURE TYPE 3R RAINPROOF



MANUFACTURE DATE


Q1 Q2 Q3 Q4

06 07 08 09 10


17722 87TH AVE NE
ARLINGTON, WA
MADE IN USA



RIGHT SIDE
KNOCKOUT LABEL
ON BOTH SIDES

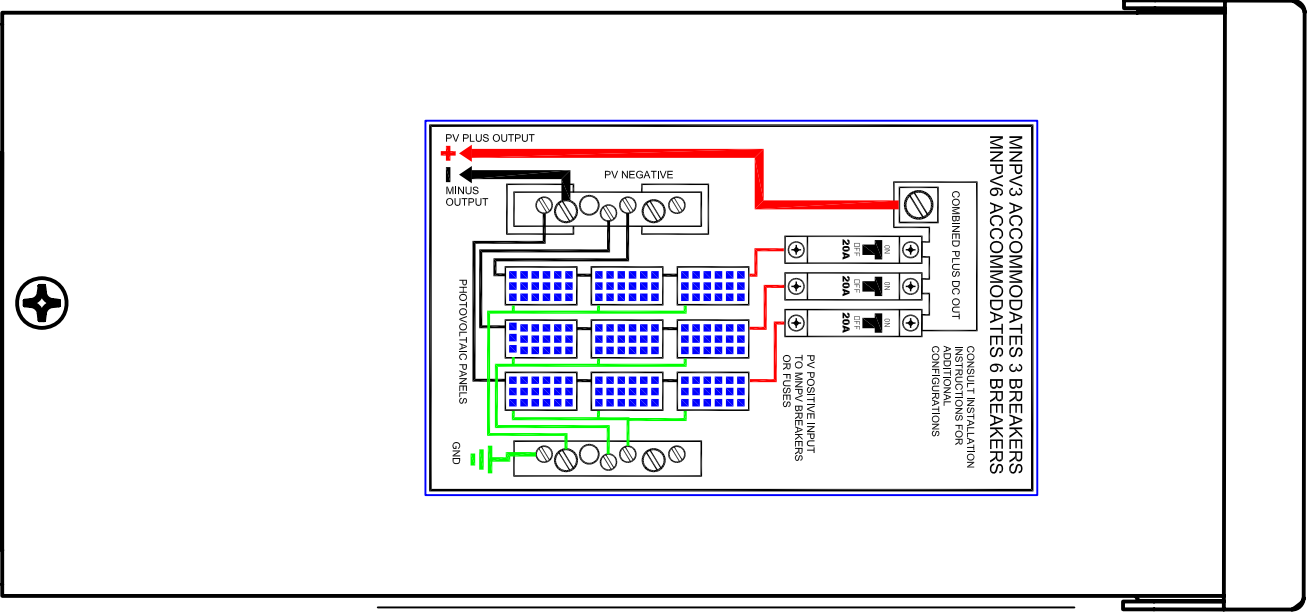

WIRING DIAGRAM
LOCATED ON INSIDE
COVER

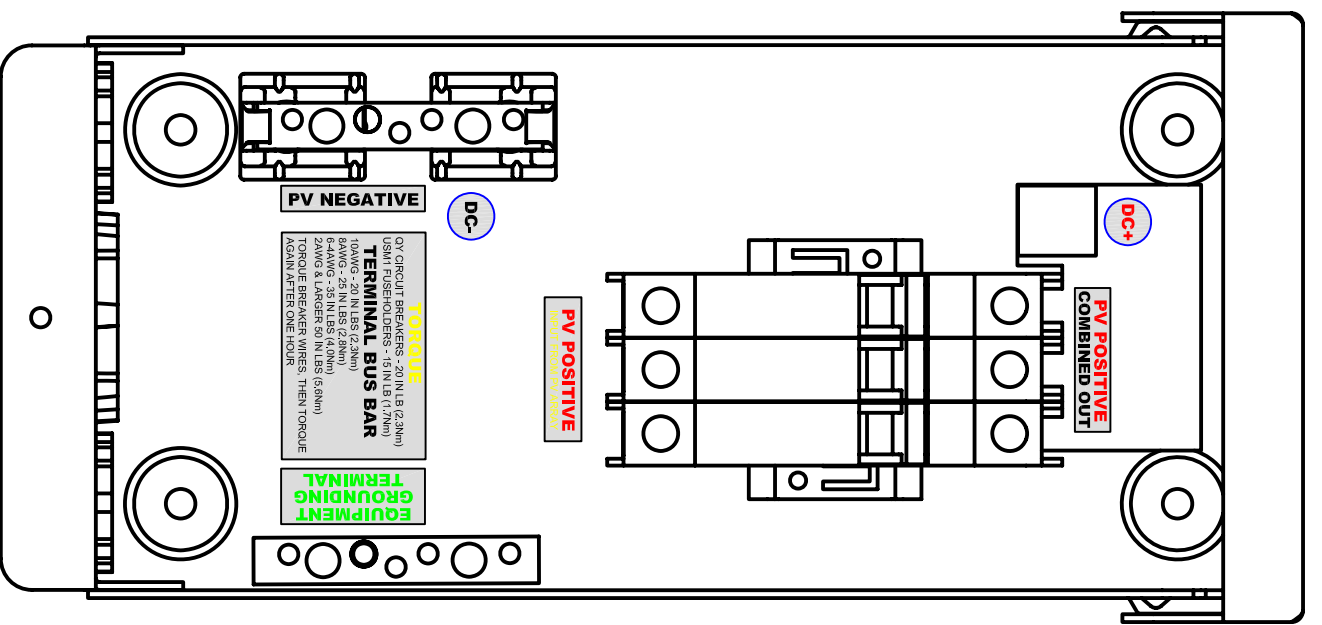

INSIDES