

# MNLSOB-TRANSMITTERS MNLSOB-RECEIVER600 & RECEIVER1000

MIDNITE SOLAR INC.

**The MidNite SOB is a simple to install, low cost rapid shut down system designed to comply with 2014 as well as 2017 NEC.**

The system uses a receiver at the module that wires in just like an optimizer and a transmitter that is installed in or near the inverter. The installer does not need to install any other wiring between the transmitter and receiver. The system is fail safe, if the receiver does not sense the keep alive data stream from the transmitter, it turns off and opens the circuit.

## PRODUCT FEATURES

- NEC 2014 690.12 requires the conductors leaving the array to be controlled to 30 volts or less
- NEC 2017 690.12 requires wiring within the array to be controlled to 80 volts or less and the conductors leaving the array to be controlled to 30 volts or less
- The Combination of the MNLSOB-T1-600 or T1-AC and MNSOB-R1-600 or MNLSOB-R1-1000 satisfies both 2014 and 2017 NEC
- Transmitter may reside inside wiring compartment of the inverter
- Transmitters come in 2 different power options: MNLSOB-T1-600 or MNLSOB-T1-AC
- A single receiver at the end of each string satisfies 2014 NEC.
- Use a receiver on each panel to satisfy the 80 volt limit for 2017 NEC
- Great for split arrays to control the conductors between the arrays
- Receiver, 600 or 1000 Volts available
- Built in Arlington, WA USA

**Designed and Assembled  
in the USA**  
using as many American  
components as feasible!



www.midnitesolar.com  
19115 - 62nd Ave. NE., Arlington, WA. 360-403-7207



**MNLSOB-R1-600  
Receiver**

**MNLSOB-R1-1000  
Receiver**



**MNLSOB-T1-600  
Transmitter**

**MNLSOB-T1-AC  
AC Transmitter**




**MNLSOB-T1-AC  
DUALCORE  
AC Transmitter**



# MNLSOB TRANSMITTERS

# MNLSOB RECEIVER600 & RECEIVER1000

MIDNITE SOLAR INC.

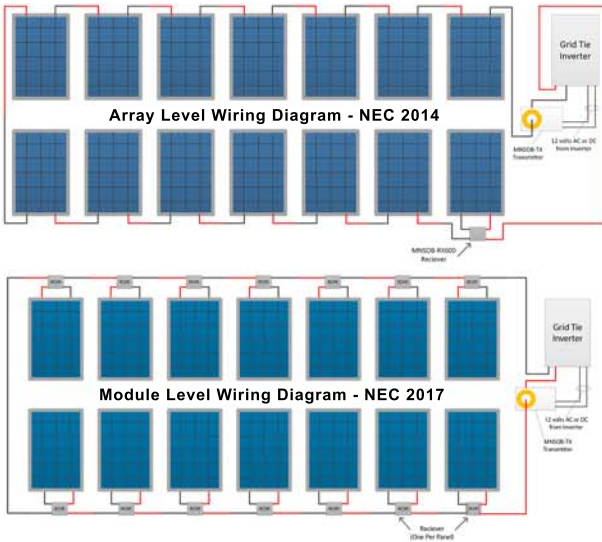

## Little SOB Specifications

### Receiver


- MNLSOB-R1-600
- MNLSOB-R1-1000
- 80V maximum panel voltage.
- 12A maximum string current.
- Operating temperature range:  
600V – 40°C to +80°C  
1000V – 40°C to +80°C

### Transmitter


- MNLSOB-T1-600 DC Transmitter designed to operate between 12-16vdc and requires 200mA
- MNLSOB-T1-AC AC Transmitter designed to operate between 90-305VAC
- Designed to support up to 6 strings.

## TRANSMITTERS

### MNLSOB-T1-600

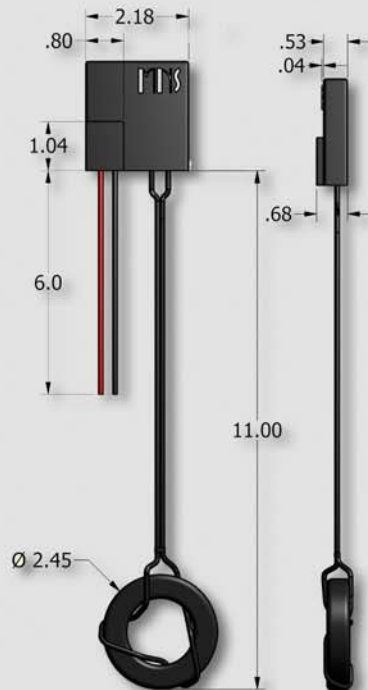


### MNLSOB-T1-AC

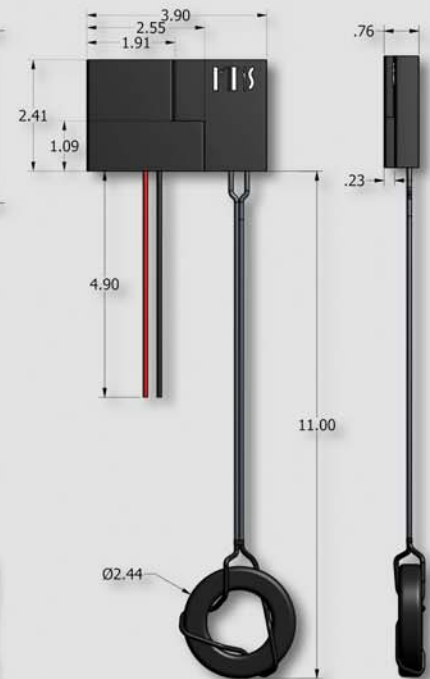

## RECEIVERS

### MNLSOB-R1-600

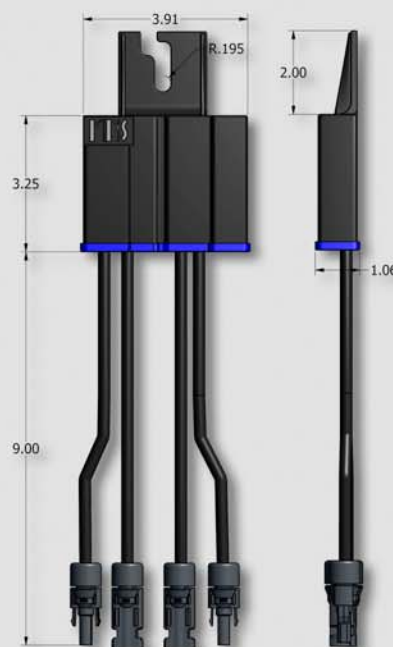

### MNLSOB-R1-1000

